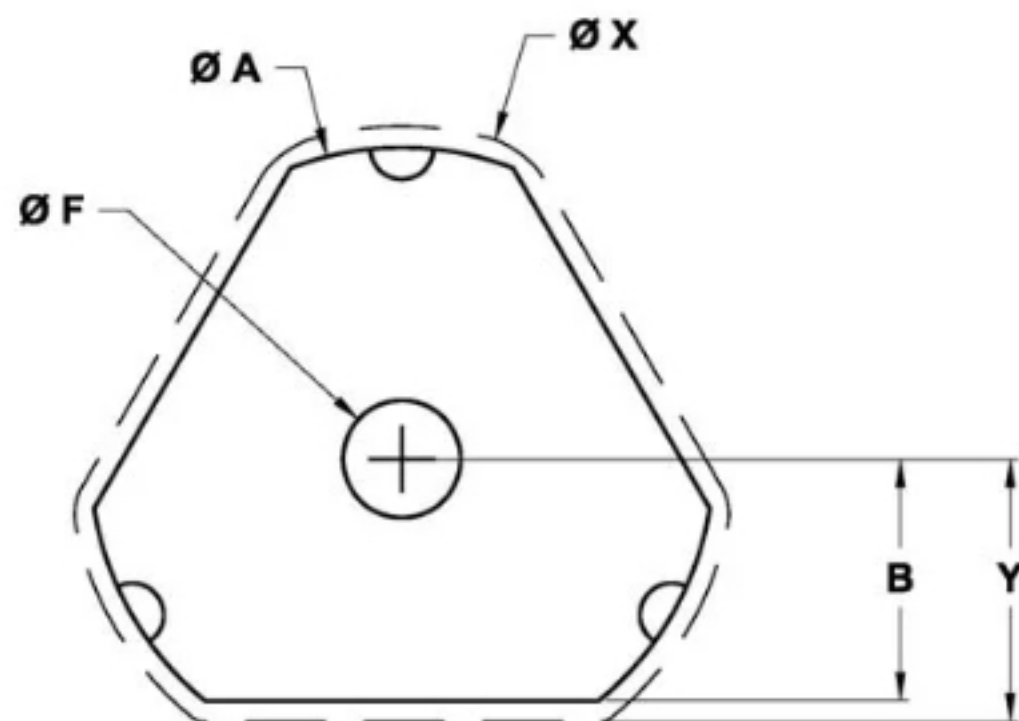


Dim. A	12mm (0.472")
Dim. B	4.95mm (0.195")
Dim. C	0.66mm (0.026")
Dim. X (dome cavity)	12.50mm (0.492")
Dim. Y	5.21mm (0.205")
Fmax/Force	230g +/- 40g, typical
Life Cycles	Up to 1,000,000
Dimple	Yes
Contact Configuration	S.P.S.T NO
Switching Voltage	.1 to 50VDC
Switching Capacity	1 Watt
Switching Current	.005 to 100 ma DC
Contact Bounce	<0.3ms make <0.6ms break
Base Material	SSTL
Plating	None
Operating Temp Rating	-45 degrees C to +100 degrees C
Storage Temp Rating	-55 degrees C to +100 degrees C